

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 755 732 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
29.01.1997 Bulletin 1997/05

(51) Int. Cl.<sup>6</sup>: **B21B 43/02**, B21B 45/02,  
C21D 1/64, C21D 9/00

(21) Application number: 96202087.1

(22) Date of filing: 23.07.1996

(84) Designated Contracting States:  
**AT BE CH DE ES FR GB IT LI LU NL PT SE**

(30) Priority: 27.07.1995 IT MI951639

(71) Applicant: **POMINI S.p.A.**  
21053 Castellanza (VA) (IT)


(72) Inventors:  
• Mantovan, Gianfranco  
21052 Busto Arsizio (IT)  
• Colombo, Ezio  
21012 Cassano Magnago (IT)

(74) Representative: **Martegani, Franco et al**  
Via Damiano Chiesa, 56  
20099 Sesto San Giovanni (Milano) (IT)

**(54) Improved facility for in-line heat treatment of hot-rolled products**

(57) A facility for in-line heat treatment of hot-rolled products, for example, long rods (16) comprises, in combination: a tank (11) suitable for containing a refrigerating liquid medium (12), a plate (13) with stationary rakes (14) and mobile rakes (15) suitable for receiving

the products (16) and transporting them through the tank (11) and outside of it on heat treatment performed, and closure lids (27) arranged above said plate (13).

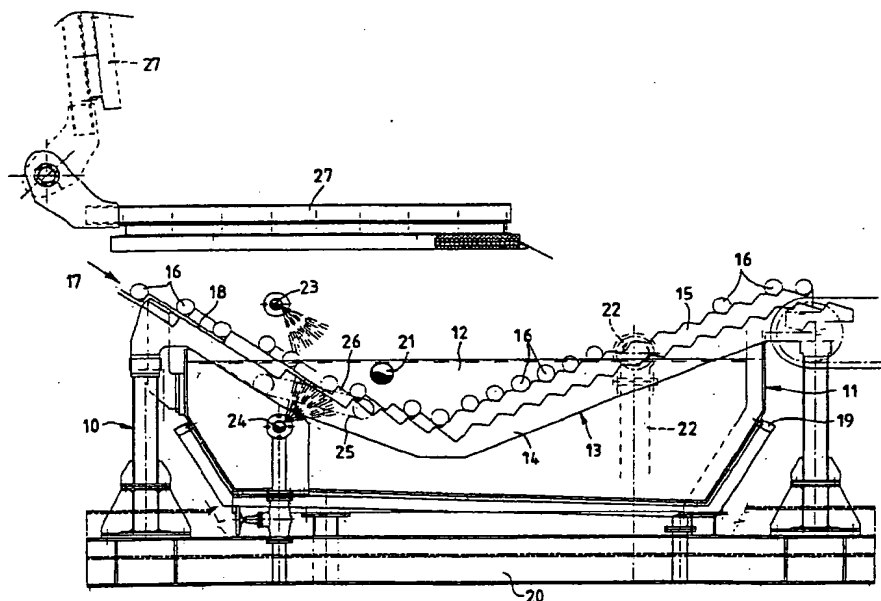

**EP 0 755 732 A1**

## Description

The present invention relates to an improved facility for in-line heat treatment of hot-rolled products, for example, long rods.

Hot rolling products, like, e.g., long rods, had always been accompanied -- since its origins -- by problems of hot-rolled product cooling.

However, as those skilled in the art are very well aware of, during the past years, the means and concepts relating to hot-rolled product cooling have been developed up to reach potentialities which allow, during the rolling step, true in-line heat treatments to be carried out.

The advantage of performing the in-line heat treatment of the hot-rolled product is associated with the elimination, or reduction, of the necessary heating energy because the material is already at high temperatures during the process.

The desired result is of obtaining, through the in-line heat treatment, a product which displays higher mechanical characteristics and/or more suitable characteristics for a determined type of use of the finished material.

More recently conceived hot-rolling mills are characterized by high productivity rates, which anyway require a plurality of cooling steps provided downstream or along the rolling line.

At present, the cooling of the hot rolled product can be obtained according to either of the following ways:

- 1) by using cooling and/or heating means characterized by having large surface areas, as cooling plates or conveyor belt units installed downstream from the rolling mill; and
- 2) by using intensive cooling and/or heating means characterized by having small size, as, e.g., air cooling fans or water cooling pipes or induction cooling means (induction ovens), and by the type of coolant or heating medium used (air, water, air-water and so forth).

In view of the above, the metal hot-rolling technique aims at proposing more and more effective devices having the end purpose of obtaining, for a determined material type, the ideal temperature curve, so as to aim at producing, already in-line, the end product, or a temperature curve which at least facilitates the subsequent steps, both of processing and of off-line heat treatment, should such a requirement arise.

In particular, attempts in such direction were done by acting on the cooling plates, limited by to the possibility of delaying the cooling rate with lids, and, on the rolling mill, by using cooling pipes along the rolling line.

The general purpose of the invention is of solving, or at least alleviating, the problems which affect the prior art, by applying the heat treatment technologies to a very wide range of materials, aiming at following ideal cooling curves according to the type of material and the

diameter thereof.

The above said purpose is accomplished by an improved facility for in-line heat treating hot-rolled products, in particular, but not exclusively, long rods, having the characteristics recited in the appended claims.

The structural and functional characteristics of the invention and the advantages thereof over the prior art will be evident from the following disclosure, made by referring to the single schematic drawing appended which shows -- in cross-sectional view -- an example of heat treatment facility realized according to the teaching of the same invention.

Referring to the appended figure, the facility for in-line heat treatment of hot-rolled products according to the present invention is generally indicated with (10) and is structurally formed by the combination of a tank (11) suitable for containing a treatment liquid medium (12), e.g., water, with a plate (13) -- having a cradle configuration -- which is partially dipped inside the liquid medium (12) contained in the tank (11).

The plate (13) can be of traditional type, comprising stationary rakes (14) with interposed mobile rakes (15) performing the task of causing the products (16), in the herein illustrated example long rods, coming from the hot rolling mill, to advance according to the direction of arrow (17), and fed along a staircase-like chute (18).

Such a feeding system is of a per se known type and consequently is not disclosed herein in greater detail.

Also the general structure of the cooling plate (13), which is of a known type for those skilled in the art, is not disclosed herein.

An example of cooling plate with stationary rakes with intervening mobile rakes is anyway illustrated in U.S. patent No. 3,332,539. The facility constituted by the combination of tank (11) and plate (13) is supported by a framework (20) which also supports pipings (21, 22), for treatment liquid medium (12) feed and drain, respectively.

Furthermore, orientatable nozzles (23) are provided outside of the tank, which are capable of a heat treatment liquid medium if and as so desired, as well as orientatable nozzles (24), inside the tank, capable of creating an agitation inside the treatment liquid medium (12).

With (19) a further drain duct for the treatment liquid medium is indicated, which is installed laterally to the tank (11).

With (25) a system of rotary chains is indicated, which acts on rods (16) and keeps them rotating at the end of the chute (18).

The facility disclosed hereinabove, realized according to the present invention, makes it possible the most suitable cooling type to be selected, and furthermore makes it possible -- in particular in case of rapid cooling -- different cooling rates to be accomplished by varying some system operating parameters (cooling water feed rate, water temperature, and so forth).

After having determined the most suitable operat-

ing parameters in order to obtain a predetermined in-line heat treatment, the operator will then be capable of securing the product quality.

The rods (16), coming from the roller conveyor of the rolling mill according to arrow (17) are delivered to the chute (18) and roll downwards until they reach the first tooth (26) of the plate (13).

It should be observed that along the chute (18), the rod (16), before reaching its end position, can be retained in various intermediate positions by means of stop means of known type, not shown in the drawing.

The possibility of stopping the product at intermediate points of the chute (18) has the purpose, above all for larger diameter products, of preventing the rod (16) from reaching excessively high speeds during its downwards sliding movement.

Furthermore, the purpose is also achieved of allowing the temperature to be determined, within certain limits, at which the heat treatment should be started inside the tank (11).

At the end of the chute (18), the rod (16) stops on the first tooth (26) of the plate (13), at a position in which it is dipped inside the tank (11), and in engagement with the chains (25) which keep it rolling, rendering the cooling uniform on it.

This feature is a particularly important one during the first step of rod cooling during which, owing to the considerable differences in temperature between the hot rod and the cooling liquid medium, situations can arise in which the cooling effect is different between the top and the bottom zones of said rod; such differences in cooling effect can be prevented precisely by keeping the rod rotating.

Through the plate (13), the rods (16) are caused to advance along the tank (11) inside which, as a function of the type of product and of the rolling speed, the material remains immersed inside the cooling liquid medium during a predetermined time.

In this regard, one should observe that from the tank (11) the cooling liquid medium can be discharged both longitudinally -- through the drain duct (22) and transversely -- through the drain duct (19) -- relatively to the rods dipped inside it.

Furthermore, the system for feeding the cooling liquid medium to the tank (11) is such as to secure that said liquid medium (e.g., water) will have, inside the tank, variable speed and temperature values, according to the needs.

Such a system can provide for the cooling liquid medium to be fed from top downwards, and to be drained from the bottom of the tank, so as to produce a forced circulation such as to prevent stagnation zones from establishing, or a feed from bottom upwards and a drain from top of tank, still for the same purpose.

As already said, the orientatable nozzles (24) perform the double purpose of delivering cooling liquid medium and keeping it agitated inside the tank (11).

As one will clearly see from Figure 1, the inclined rakes of the plate (13) which perform the function of

extracting the rods (16) from the tank (11) (i.e., the right-hand side portion looking at the drawing), have differently contoured teeth from the section of rakes designed to receive the rods (16) from the rolling mill roller conveyor (the left-hand side section, looking at the drawing).

Finally, the tank (11) can be closed at its upper portion by means of upper removable lids (27) which, should the operator wish to perform a slow cooling of the rolled products, will be lowered down (as shown in solid lines in the figure), above the first portion of the plate, so as to reduce the heat loss which, during this step, mainly takes place by an irradiation mechanism.

Of course, in this latter case, the tank (11) shall be empty, that is to say, no cooling liquid medium will be used.

The purpose recited in the preamble to the disclosure, of having available a facility for the in-line heat treatment of hot-rolled products in which all the necessary means for physically implementing a controlled cooling of the product are concentrated, is thus accomplished.

In particular, with the facility according to the present invention, the following three different treatment types can be carried out:

#### 1) Rapid cooling

The rolled product, still hot, is immersed into the tank (11) filled with cooling liquid medium (e.g., water), so as to accomplish a high "speed cooling" (quenching). The lids (27) are lifted up.

#### 2) Slow cooling

The rolled product, still hot, is deposited on the plate (13) while this is closed by the upper covering lids (27), which perform the purpose of slacking down the cooling of the rolled product. The tank (11) is empty.

#### 3) Conventional cooling

The rolled product, still hot, is deposited on the plate in which it is air cooled without any covering, and, of course, with the tank (11) being empty.

In practice, by using the facility according to the present invention, the most suitable cooling type can be selected and it is furthermore possible, in particular in the case of fast cooling, the cooling speed to be regulated at different values by varying some system operating parameters (coolant water flow rate, water temperature, and so forth).

This means that once that the most suitable operating parameters in order to have a predetermined in-line heat treatment have been selected, the operator will be capable of securing the quality of the end product.


The purpose recited in the preamble to the disclosure is thus accomplished.

### Claims

1. Facility for in-line heat treatment of hot-rolled prod-

ucts, for example, long rods (16) characterized in that it comprises, in combination: a tank (11) suitable for containing a refrigerating liquid medium (12), which is continuously fed to the tank so as to establish a forced circulation thereof and in which, in order to increase the agitation, internal (23) and/or external (24) adjustable devices are installed which produce jets of fluid medium inside the interior of said tank, a chute (18) suitable for receiving the product (16) coming from the rolling mill and retaining it before said product getting dipped into said tank (11), and a plate (13) with stationary rakes (14) and mobile rakes (15) suitable for receiving the products (16) and transporting them through the tank (11) and outside of it on heat treatment performed.

2. Facility according to claim 1, characterized in that said devices (23, 24) are constituted by nozzles respectively arranged inside and outside said tank (11).
3. Facility according to claim 1, characterized in that at the end of said chute (18), the products (16) are engaged by devices (25) suitable for keeping them revolving.
4. Facility according to claim 1, characterized in that it comprises closure lids (27) arranged above the plate (13).
5. Facility according to claim 1, characterized in that said refrigerating liquid medium is water having a variable temperature within the range of from 20 to 70°C.
6. Facility according to claim 1, characterized in that said refrigerating liquid medium is water containing suitable polymers for varying the cooling capacity of it.
7. Facility according to claim 1, characterized in that said adjustable devices (23, 24) deliver pressurized water.
8. Facility according to claim 1, characterized in that said adjustable devices deliver pressurized air.

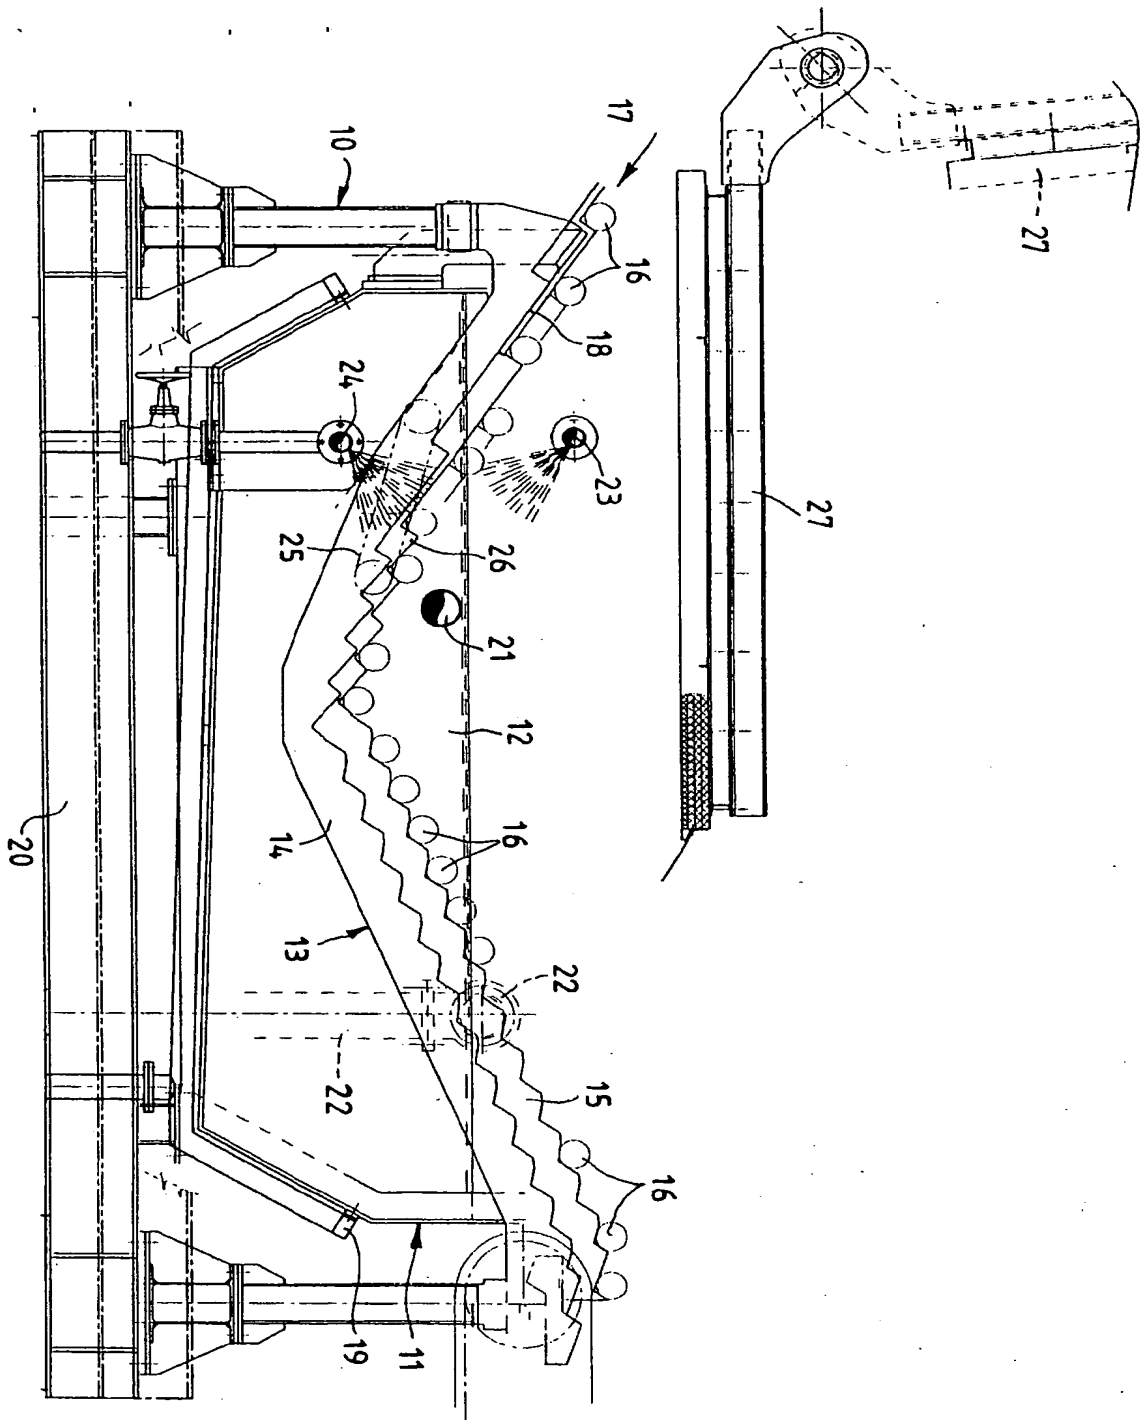



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 96 20 2087

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	DE-C-823 885 (KLEFF) * the whole document *	1-3	B21B43/02 B21B45/02 C21D1/64 C21D9/00
Y	--- AUGUSTI: "automatic on-line straightening, cutting to length and stacking of small and medium rolled sections" January 1991, IRON AND STEEL ENGINEER, PITTSBURGH USA XP000202022 865 * page 40 - page 41 *	1-3	
A	--- PATENT ABSTRACTS OF JAPAN vol. 010, no. 120 (C-343), 6 May 1986 & JP-A-60 245719 (KAWASAKI SEITETSU KK), 5 December 1985, * abstract *	1-3,7,8	
A	--- FR-A-2 133 268 (USINES DEHOUSSE) 24 November 1972 * figure 1 *	4	
A	--- DE-A-18 04 932 (SCHLÖMANN AG)	1	TECHNICAL FIELDS SEARCHED (Int.Cl.6)
A	--- PATENT ABSTRACTS OF JAPAN vol. 007, no. 139 (C-171), 17 June 1983 & JP-A-58 052442 (NIHON HATSUJIYOU KK), 28 March 1983, * abstract *	1	B21B C21D
A	--- US-A-4 486 246 (WARCHOL JOSEPH F) 4 December 1984 * the whole document *	5,6	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 22 November 1996	Examiner Gerard, O
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/92 (Pw/C01)

A. KLASIFIZIERUNG DES ANMELDUNGSGEGENSTANDES  
IPK 7 B21B45/02 C21D1/63

Nach der Internationalen Patentklassifikation (IPK) oder nach der nationalen Klassifikation und der IPK

B. RECHERCHIERTE GEBIETE

Recherchierter Mindestprüfstoff (Klassifikationssystem und Klassifikationssymbole)  
IPK 7 B21B B22D C21D

Recherchierte aber nicht zum Mindestprüfstoff gehörende Veröffentlichungen, soweit diese unter die recherchierten Gebiete fallen

Während der internationalen Recherche konsultierte elektronische Datenbank (Name der Datenbank und evtl. verwendete Suchbegriffe)

EPO-Internal, PAJ

C. ALS WESENTLICH ANGESEHENE UNTERLAGEN

Kategorie*	Bezeichnung der Veröffentlichung, soweit erforderlich unter Angabe der in Betracht kommenden Teile	Betr. Anspruch Nr.
Y	DE 25 48 154 A (SACK GMBH MASCHF) 5. Mai 1977 (1977-05-05) in der Anmeldung erwähnt	1,2,5
A	Anspruch 1; Abbildung 1 -----	3,4,6-12
Y	EP 0 960 670 A (KAWASAKI STEEL CO) 1. Dezember 1999 (1999-12-01) Zusammenfassung; Abbildung 1 Seite 4, Zeile 4 - Zeile 27 -----	1,2,5
A	US 3 680 344 A (MANTHEY WILLIE ET AL) 1. August 1972 (1972-08-01) Anspruch 1; Abbildung 1 -----	1,7
A	EP 0 755 732 A (POMINI SPA) 29. Januar 1997 (1997-01-29) Ansprüche 1,2,7; Abbildung 1 -----	1,7



Weitere Veröffentlichungen sind der Fortsetzung von Feld C zu entnehmen



Siehe Anhang Patentfamilie

\* Besondere Kategorien von angegebenen Veröffentlichungen :

\*A\* Veröffentlichung, die den allgemeinen Stand der Technik definiert, aber nicht als besonders bedeutsam anzusehen ist

\*E\* älteres Dokument, das jedoch erst am oder nach dem internationalen Anmeldedatum veröffentlicht worden ist

\*L\* Veröffentlichung, die geeignet ist, einen Prioritätsanspruch zweifelhaft erscheinen zu lassen, oder durch die das Veröffentlichungsdatum einer anderen im Recherchenbericht genannten Veröffentlichung belegt werden soll oder die aus einem anderen besonderen Grund angegeben ist (wie ausgeführt)

\*O\* Veröffentlichung, die sich auf eine mündliche Offenbarung, eine Benutzung, eine Ausstellung oder andere Maßnahmen bezieht

\*P\* Veröffentlichung, die vor dem internationalen Anmeldedatum, aber nach dem beanspruchten Prioritätsdatum veröffentlicht worden ist

\*T\* Spätere Veröffentlichung, die nach dem internationalen Anmeldedatum oder dem Prioritätsdatum veröffentlicht worden ist und mit der Anmeldung nicht kollidiert, sondern nur zum Verständnis des der Erfindung zugrundeliegenden Prinzips oder der ihr zugrundeliegenden Theorie angegeben ist

\*X\* Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann allein aufgrund dieser Veröffentlichung nicht als neu oder auf erfinderischer Tätigkeit beruhend betrachtet werden

\*Y\* Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann nicht als auf erfinderischer Tätigkeit beruhend betrachtet werden, wenn die Veröffentlichung mit einer oder mehreren anderen Veröffentlichungen dieser Kategorie in Verbindung gebracht wird und diese Verbindung für einen Fachmann naheliegend ist

\*G\* Veröffentlichung, die Mitglied derselben Patentfamilie ist

Datum des Abschlusses der internationalen Recherche

19. August 2004

Absendedatum des internationalen Recherchenberichts

30/08/2004

Name und Postanschrift der Internationalen Recherchenbehörde

Europäisches Patentamt, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Bevollmächtigter Bediensteter

Forciniti, M





# INTERNATIONALER RECHERCHENBERICHT

Angaben zu Veröffentlichungen, die zur selben Patentfamilie gehören

Internationales Aktenzeichen

PCT/EP2004/004830

Im Recherchenbericht angeführtes Patentdokument	Datum der Veröffentlichung	Mitglied(er) der Patentfamilie	Datum der Veröffentlichung
DE 2548154	A	05-05-1977	DE 2548154 A1 05-05-1977
			AT 354393 B 10-01-1979
			AT 757076 A 15-06-1979
			BE 847744 A1 14-02-1977
			BR 7607235 A 13-09-1977
			FR 2328528 A1 20-05-1977
			GB 1558819 A 09-01-1980
			IT 1073115 B 13-04-1985
			JP 1258086 C 29-03-1985
			JP 52057008 A 11-05-1977
			JP 59034771 B 24-08-1984
			NL 7611980 A 02-05-1977
			US 4088309 A 09-05-1978
			ZA 7606384 A 26-10-1977
EP 0960670	A	01-12-1999	JP 2000042700 A 15-02-2000
			BR 9805030 A 28-12-1999
			CA 2254654 A1 28-11-1999
			CN 1237493 A 08-12-1999
			EP 0960670 A1 01-12-1999
			TW 404868 B 11-09-2000
			US 6250370 B1 26-06-2001
			ZA 9905590 A 28-03-2000
US 3680344	A	01-08-1972	DE 2002272 A1 14-10-1971
			DE 2158091 A1 07-06-1973
			AT 316780 B 25-07-1974
			AT 300236 B 25-07-1972
			BE 784713 A1 02-10-1972
			BE 756498 A1 01-03-1971
			FR 2074895 A5 08-10-1971
			FR 2160797 A2 06-07-1973
			GB 1371445 A 23-10-1974
			GB 1301509 A 29-12-1972
			JP 820260 C 30-06-1976
			JP 49012438 A 02-02-1974
			JP 50033261 B 29-10-1975
			NL 7016049 A ,B 22-07-1971
			NL 7208792 A 28-05-1973
			US 3895498 A 22-07-1975
			IT 1005079 B 20-08-1976
			ZA 7207173 A 27-06-1973
EP 0755732	A	29-01-1997	IT MI951639 A1 27-01-1997
			AT 187107 T 15-12-1999
			DE 69605367 D1 05-01-2000
			DE 69605367 T2 25-05-2000
			EP 0755732 A1 29-01-1997
			ES 2140020 T3 16-02-2000
			US 5679307 A 21-10-1997

**THIS PAGE BLANK (USPTO)**